




ImagePro 8052
Data/Video Projector
Model 28A8052

FAST FAX

Specifications (Specifications are subject to change without notice)

LCD Type	0.9" polysilicon active-matrix TFT x 3
Brightness	2200 ANSI Lumens (1,760 whisper mode)
Resolution	800 x 600 pixels (H X V)
Contrast	400:1
Keystone Correction	Digital, selectable
Scanning Frequency	fh 31-80kHz fv 56-85hz
Lens	Manual Zoom 1:1.3 (F1.7-2.1)
Computer Compatibility	VGA, SVGA, XGA/SXGA (Compressed), Mac, Mac 13" and Mac 16"
Projection Configuration	Front/rear/ceiling
Aspect Ratio	4:3, 16:9 Selectable
Image Control	Freeze function, Electronic Zoom and pan
Correction Control	Gamma and Color
Video Compatibility	NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, PAL60, SECAM, S-Video, HDTV, 480i, 575i, 480p, 1080i, 720p
Lamp	200W UHB
Lamp Life	2000 hours (typical)
Audio	Speakers, 1W x 2 Stereo
Throw Distance	62" - 246"
Screen Size	40" - 200" diagonal
Inputs	(1) Min DIN 4-pin S-Video (1) RCA composite video (1) RCA, Component Video (2) Computer Signal; D-sub 15 pin (1) RCA jack, audio, video (2) mini jack audio, PC (1) D-sub 15-pin, monitor (1) Audio, Stereo mini jack (1) Mouse control via USB jack (b-type)
Outputs	RS-232C (1) D-sub, 15 pin Kensington slot 37dB, ultra quiet. 34dB, Whisper Mode
Control	RS-232C (1) D-sub, 15 pin
Security	Kensington slot
Noise Level	37dB, ultra quiet. 34dB, Whisper Mode
Power	AC90-132 V / AC220-240V, 50/60 Hz, 310W
Size (WxHxD)	11.7" x 3.0" x 9.0"
Weight	7 lbs
Shipping Weight	16 lbs.
Carton Size	15" x 13" x 10.5"
Accessories Included	Remote control with 4 way mouse, Batteries, Power cord (U.S., UK, Euro), Video cable, RGB cable, mouse cable (ps/2) operator's manual, handle strip and carry case.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamps 456-227; Rolling Briefcase; 185-406

Five (5) year Limited Warranty on Parts and Labor in North America, lamp excluded (for other locations, local warranties apply.) Includes Dukane's FREE 24 month Peace-of-Mind Loamer Program.

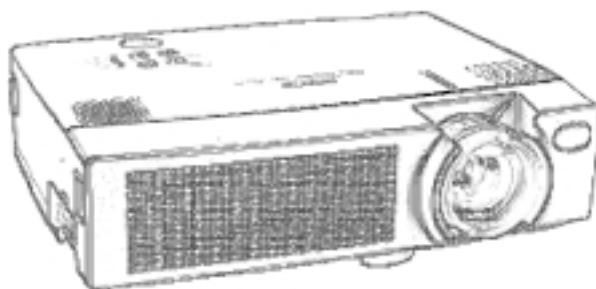

Performance and Portability

The **Dukane ImagePro 8052™** is the ideal tool for the presenter on the go. At only 7 lbs. The 8052 can be easily transported. It provides an exceptional image that is sufficiently bright to overcome ambient lighting in an office, conference room, or school. It will display images from a PC or MAC, and video from a VCR, DVD or other source. The projector sets up in seconds and features easy operation for the non-technical presenter.

Featuring true **800 x 600 SVGA** resolution plus compressed XGA and 2200 lumens of brightness, the **ImagePro 8052** is engineered to reproduce data with razor sharp accuracy and brilliant color imagery. With the capability to show HDTV and digital TV formats, this unit will meet all your future requirements.

In addition, the 8052 has a very quiet fan plus "whisper" mode where the light output is reduced to 1760 lumens and the operating unit can barely be heard. Other features are the component video input, an FCC Class B home environment listing, digital zoom, freeze for video, a Kensington slot for security, plus a super easy to use control format. The remote control is credit card size with a simple 4-way mouse function. Everything is arranged for your convenience and speed in set-up and operation.

This projector is backed by **Dukane's legendary service and a industry leading FIVE YEAR limited warranty**, plus a two year "Peace of Mind" program which is the finest in the industry.

Audio Visual Products



DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, IL 60174
Toll Free (800) 676-2485 or 2486
Fax (630) 584-5156
e-mail: avsales@dukane.com



Image Pro® is a registered trademark of **DUKANE** Corporation.